


# SELLOS PARA BOMBAS GRUNDFOS

## Tipo GR-A



CRK2/CR4/CRK8/CRK16,  
CRK2/4 AUUV, CRK8/16  
AUUV, CRK2/4

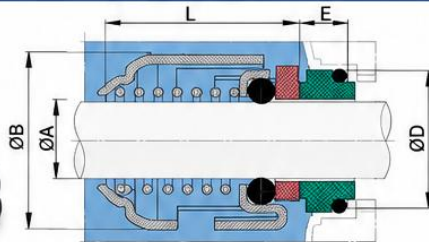

Dimensiones en milímetros

| ØA | ØB | ØC | ØD | L  | E    |
|----|----|----|----|----|------|
| 12 | 29 | 23 | 19 | 31 | 8    |
| 16 | 34 | 27 | 23 | 27 | 11,6 |



## MATERIALES

- ▶ **CARA ROTATORIA:** c. silicio.
- ▶ **ESTACIONARIA:** c. silicio.
- ▶ **ELASTÓMEROS:** viton, EPDM



## RANGOS DE OPERACIÓN

|             |                        |
|-------------|------------------------|
| PRESIÓN     | Hasta 175 PSI (12 bar) |
| VELOCIDAD   | 1960 FPM (10m/s)       |
| TEMPERATURA | -30°C a 180°C          |